
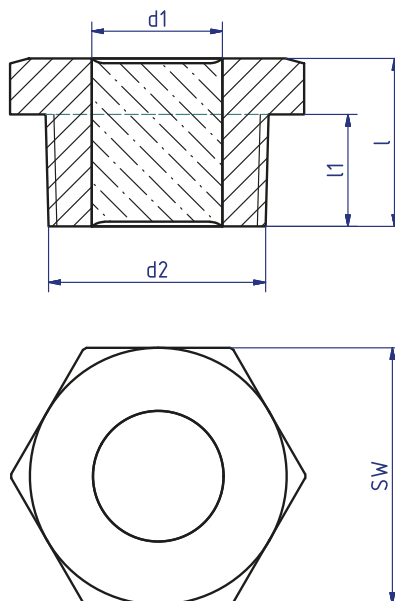


METAGLAS® Threaded sight glass – NPT-thread

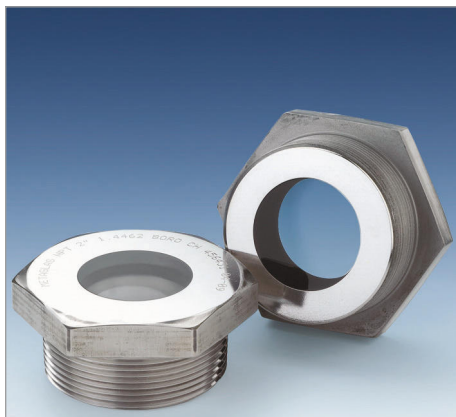

Applications

- Female connection with NPT or NPTF thread

Advantages

- Very compact
- High pressure resistance
- Simple assembly
- Long service life

Ring materials	Temperature (TS)
S355J2+N	-10°C to +300°C
1.4462	-30°C to +280°C
2.4602	-60°C to +300°C

Approvals and technical data

- Pressure Equipment Directive 2014/68/EU, Module H (DIN/EN/ISO 9001)
- AD 2000 Standards W0/TRD 100
- Sight glass fused to metal similar to DIN 7079
- Materials to VdTÜV specifications and the DIN/EN designated standards

Materials

- Ring material: carbon steel S355J2+N, stainless steel 1.4523
- Glass: sodalime glass to DIN 8902

Material certificates

- Certificate of Conformity to EN 10204-3.1

Operating conditions

- Pressure: 100 bar
- Temperature: -30°C to +150°C

d2 (Thread)	SW	d1	l	l1
1/4" NPT	21	8	17	11
3/8" NPT	24	10	20	13
1/2" NPT	31	12	25	15
3/4" NPT	36	15	26	16
1" NPT	41	19	32	18
1 1/4" NPT	50	22	35	23
1 1/2" NPT	55	25	32	20
2" NPT	70	35	33	22